



## Infračervené zdroje ⇒ Infračervené halogenové žárovky InfraRed VITAE

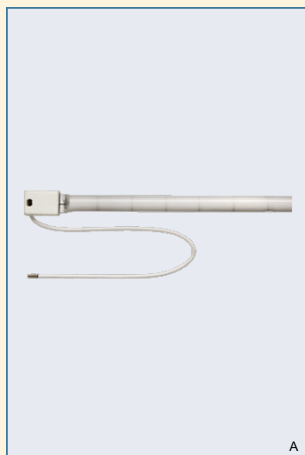

### Lamp:

- Tubular double-ended InfraRed halogen lamp

### Features:

- High-efficiency heat source for relaxation applications such as InfraRed sauna cabins
- Comfortable heat
- Short and effective sessions
- Designed to match the body
- Heat can be directed by reflectors
- Easy to install


### Benefits:

- A healthy and comfortable form of relaxation
- No pre-heating for shorter, more effective sessions and higher energy-efficiency
- Short-wave technology for optimum warming of human skin and muscles
- Easy to install, even in smaller spaces
- Instant heat: full power within 1 second of switch-on
- Clean heat source with no emissions
- Safe: quartz envelope is heat-shock resistant

- Economical: more than 90% of consumed energy is transmitted as heat
- Fully dimmable: output accurately controllable from 0 to 100%
- Can be used with presence detection: on/off switching does not affect lamp lifetime
- Low maintenance: long lifetime of about 5.000 hours
- Compact heat source; lamps have a narrow diameter

### Applications:

- InfraRed sauna cabins
- Various industrial processes



Rozměry (mm)

A	C	D	W	X1	X2
min.	max.	max.	nom.	nom.	nom.
738	787.5	11	700	1200	230

Typ	Příkon	Napětí	Název produktu			Patice	Poloha svícení	Foto písmeno	Objednací kód
			Finální úprava baňky	Typ balení	Uspořádání balení				
14142Z	500W	235V	TRL	UNP	10	SK15	Univerzální	A	8711500... 185556 25
14117Z	750W	230V	CL	UNP	10	SK15	Univerzální	B	518569 25
14155Z	750W	230V	CL	UNP	10	SK15	Univerzální	B	186515 25
14124Z	750W	230V	TRL	UNP	10	SK15	Univerzální	A	519726 25

Infračervené zdroje ⇒ Infračervené halogenové žárovky

## InfraRed VITAE

### Technická data


Název produktu	Finální úprava baňky	Přehled patic	Životnost při 50% selhání (h)	Consumed Power (W/cm)	Philips kód
14142Z 500W 235V TRL	Translucent	Spliced	5000	7.14	14142Z
14117Z 750W 230V CL	Čirá	Spliced	5000	10.71	14117Z
14155Z 750W 230V CL	Čirá	Spliced	5000	10.71	14155Z
14124Z 750W 230V TRL	Translucent	Spliced	5000	10.71	14124Z

### Logistická data

Název produktu	Typ balení	Popis obalu	Počet ks v balení	Uspořádání balení	Množství v balení	Délka balení (mm)	Šířka balení (mm)	Výška balení (mm)	Netto hmotnost 1ks (g)
14142Z 500W 235V TRL	UNP	Unpacked	10	10	1	1000	285	66	81
14117Z 750W 230V CL	UNP	Unpacked	10	10	1	1000	285	66	48
14155Z 750W 230V CL	UNP	Unpacked	10	10	1	1000	285	66	93
14124Z 750W 230V TRL	UNP	Unpacked	10	10	1	1000	285	66	93

### Patice

SK15



### Poloha svícení

Univerzální

